



EASIHOLD
5L

INSTRUCTION MANUAL

**Top Tips
for Application**

Easihold 5L

Easihold & Easihold Natural

Equipment

How to Use: Spray Method

How to Use: Mix Method

Vuba Stone Glue

Equipment

How to Use: Spray Method

How to Use: Mix Method

Vuba Mulch Glue

Equipment

How to Use: Spray Method



SPRAY METHOD

Easihold & Easihold Natural.

- ✓ **Recommended for mulch & existing stones.**
- ✓ **Most efficient application method.**
- ✓ **Lasts up to 3 years.**
- ✓ **Fast, reliable results.**

EQUIPMENT YOU WILL NEED



**AIRLESS
SPRAYER**



TROWEL



TAPE



SPRAY METHOD

Easihold & Easihold Natural.



1



SPRAY

Use the Easihold Airless Sprayer to apply an even coat on your stones or mulch.

2



COMPACT

Compact the surface with a trowel or flat instrument. Wait 30 minutes.


3



SPRAY

Apply the final coat by repeating Step 1. Allow the area to fully dry.

BEFORE YOU START



Check the size of your area in order to use the correct amount of product. **Use the Coverage Calculator on the Easihold website if you are unsure.**



In the case of a spillage use a stiff brush and hot water to remove product from unwanted areas.



Tape off your area and wear gloves to ensure a neat and tidy application.



Remember to flush out your airless sprayer with hot water after each use.

MIX METHOD

Easihold & Easihold Natural.

- ✓ **Recommended for NEW stones.**
- ✓ **Lasts up to 3 years.**
- ✓ **Fast, reliable results.**
- ✓ **Simple, easy application.**

EQUIPMENT YOU WILL NEED



**MEASURING
JUG**



**MIXING
BUCKET**



TROWEL



TAPE

*Not suitable for mulch.



MIX METHOD

Easihold & Easihold Natural.



1



MEASURE & MIX

Use a measuring jug to measure out how much Easihold you will need for your surface and mix with your stones in a bucket.

Ensure all stones are evenly coated in Easihold before proceeding.

2



POUR

Once Easihold is mixed well with your stones, pour the mixture into your desired area.

3



SPREAD

Spread the mixture out evenly at a depth of 25mm with a trowel.

4



COMPACT

Use your trowel to then compact the surface. Leave to dry.

BEFORE YOU START



Check the size of your area in order to use the correct amount of product. **Use the Coverage Calculator on the Easihold website if unsure.**



In the case of a spillage use a stiff brush and hot water to remove product from unwanted areas.



Tape off your area and wear gloves to ensure a neat and tidy application.



Wear gloves to avoid your hands getting sticky!



EASIHOLD

Easihold & Easihold Natural

Equipment & Application
Methods.



EVERYTHING YOU NEED TO KNOW



Stone Glue & Mulch Glue

Equipment & Application
Methods.

EVERYTHING YOU NEED TO KNOW



SPRAY METHOD

Vuba Stone Glue & Vuba Mulch Glue

- ✓ Dilutable formula goes further.
- ✓ Recommended for mulch & existing stones.
- ✓ Most effecient application method.
- ✓ Lasts up to 3 years.
- ✓ Fast, reliable results.

EQUIPMENT YOU WILL NEED



BUCKET



MEASURING
JUG



AIRLESS
SPRAYER



TROWEL




TAPE

*Please note: Vuba Stone Glue & Vuba Mulch Glue **must be diluted before being used with an airless sprayer.**



SPRAY METHOD

Vuba Stone Glue & Vuba Mulch Glue.



1




MEASURE & MIX

Mix Vuba Stone & Vuba Mulch Glue at a ratio of:
2:1 with water for stones.
1:1 with water for mulch.

Ensure that the materials are mixed well in a bucket before adding to Airless Sprayer.

2

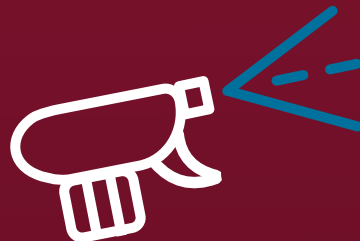

SPRAY

Use the Easihold Airless Sprayer to apply an even coat on your stones or mulch.


3



COMPACT

Compact the surface with a trowel or flat instrument. Wait 30 minutes.

4

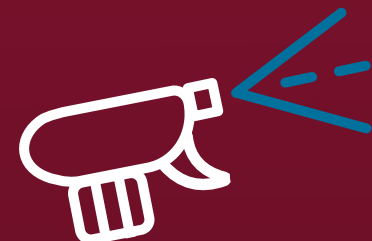

SPRAY

Apply the final coat by repeating Step 1. Leave to dry.

BEFORE YOU START



Check the size of your area in order to use the correct amount of product.
Use the Coverage Calculator on the Easihold website if unsure.



In the case of a spillage use a stiff brush and hot water to remove product from unwanted areas.



Tape off your area and wear gloves to ensure a neat and tidy application.



Remember to flush out your airless sprayer with hot water after each use.

MIX METHOD

Vuba Stone Glue & Vuba Mulch Glue

- ✓ Recommended for **NEW** stones.
- ✓ Lasts up to **3 years**.
- ✓ Fast, reliable results.
- ✓ Simple, easy application.

EQUIPMENT YOU WILL NEED



BUCKET



MEASURING
JUG



TROWEL




TAPE

*Please note: the mixing method is **not suitable for mulch**.



MIX METHOD

Vuba Stone Glue



1



MEASURE & MIX

Mix Vuba Stone & Vuba Mulch Glue at a ratio of:

2:1 with water for stones.

1:1 with water for mulch.

Ensure that the materials are mixed well in a bucket before adding stones.


2



POUR

Once Vuba Stone Glue is mixed well with your stones, pour the mixture into your desired area.

3

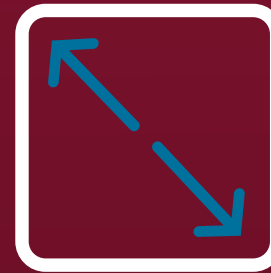

SPREAD

Spread the mixture out evenly using a trowel at a depth of 25mm.

4



COMPACT

Use a trowel or flat instrument to compact the surface. Leave to dry.

BEFORE YOU START



Check the size of your area in order to use the correct amount of product.
Use the Coverage Calculator on the Easihold website if unsure.



In the case of a spillage use a stiff brush and hot water to remove product from unwanted areas.



Tape off your area to ensure a neat and tidy application.




Wear gloves to avoid your hands getting sticky!

BEFORE APPLICATION



WARM & DRY CONDITIONS.

Ensure that there will be warm (above 0°C), dry conditions for 72 hours before & after application) and Humidity is below 85%



MEASURE SURFACE AREA.

Measure the size of your surface area to ensure you use the correct amount of product to achieve the best results.



ENSURE STONES ARE CLEAN & DRY.

Wash and dry your stones before application to remove any dust or debris. Ensure stones are completely dry before applying any product.



TAPE OFF YOUR AREA.

Tape off where you are planning to apply Easihold/Vuba Stone Glue/ Vuba Mulch Glue to protect surrounding areas from spillages.



WEAR GLOVES FOR APPLICATION.

We advise wearing gloves during the application process to avoid your hands getting sticky!



FOLLOW INSTRUCTIONS.

Follow the instructions laid out in this Instruction Manual carefully to ensure the best results.

EASIHOLD IS PERFECT FOR:

STONES

BEST RESULTS



4-7mm



8-18mm



19-25mm


AND MULCH.



BARK MULCH



CEDAR MULCH



RUBBER MULCH



NEED OUR HELP WITH SOMETHING? CONTACT OUR TEAM AT SALES@EASI-HOLD.COM OR 01482 778879

TOP TIPS



ENSURE SURFACE IS EVENLY COATED.

Use gradual, even sprays when using the Spray Method. If using the Mix Method, ensure all stones are evenly coated to ensure a lasting hold.



DO NOT OVERSATURATE.

Accurately measure out how much product you'll need for the surface area you will be covering to avoid oversaturation.



COMPACT YOUR SURFACE WELL.

Good compaction after applying the product will increase the bonds by up to 70%.



STORE IN COOL, DRY PLACE.

Store in a cool, dry area away from direct sunlight or frost before and after use.



ALLOW SURFACE TO DRY.

Allow your surface to completely dry before allowing foot traffic.



CLEAN AIRLESS SPRAYER AFTER USE.

Flush out your Airless Sprayer with hot water after use to remove excess Easihold.



BEFORE



AFTER



NEED OUR HELP WITH SOMETHING? CONTACT OUR TEAM AT SALES@EASI-HOLD.COM OR **01482 778879**



THE 5L **SPRAY** METHOD.

For use with the 5L Easihold only.

- ✓ COMPATIBLE WITH OUR OLD FORMULA.
- ✓ LASTS UP TO 3 YEARS.
- ✓ FAST, RELIABLE RESULTS.
- ✓ IDEAL FOR EXISTING STONES.

YOU WILL NEED:



EASIHOLD AIRLESS
PRESSURE SPRAYER.



RAKE.



TROWEL.



TAPE.



WARM & DRY
CONDITIONS.



BEFORE YOU START

Check the size of your area in order to use the correct amount of Easihold. Use the Coverage Calculator on the Easihold website if unsure.

1



SPRAY

Use even & controlled sprays to coat your surface.

2



RAKE

Use a flat instrument to level the surface of stones or mulch.

3



SPRAY

Repeat Step 1. Use even & controlled sprays for the 2nd coat.

4



COMPACT

Use a flat instrument to level the surface of stones or mulch.



WAIT 12-36 HOURS

5



SPRAY

Apply the final coat once the surface is completely dry.



In the case of a spillage, use a stiff brush and hot water to remove EASIHOLD from unwanted areas.



Wear gloves and tape off your chosen area to ensure a neat and tidy application.



No need to dilute - Easihold is ready to use.



Remember to flush out your airless sprayer with hot water after each use.

EASIHOLD Airless Sprayer now available - the perfect companion to the EASIHOLD 5L, 4.1L & 2L.



EASIHOLD

WWW.EASIHOLD.COM
SALES@EASI-HOLD.COM
01482 778879



FOLLOW US ON SOCIALS

THE 5L MIX METHOD.

For use with the 5L Easihold only.

- ✓ EASY APPLICATION METHOD.
- ✓ LASTS UP TO 3 YEARS.
- ✓ FAST, RELIABLE RESULTS.
- ✓ IDEAL FOR NEW STONES.



We recommend a 1:25 mixing ratio of stones:EASIHOLD when using this method of application.

YOU WILL NEED:



BUCKET FOR MIXING.



WEED MEMBRANE.



TROWEL.



TAPE.



WARM & DRY CONDITIONS.



BEFORE YOU START

Check the size of your area in order to use the correct amount of Easihold. **Use the Coverage Calculator on the Easihold website if unsure.**

Don't forget to wear gloves! Avoid the stress of mess, our durable gloves are available now.

1



MEASURE

Measure out how much EASIHOLD you will need.

2



POUR

Pour the EASIHOLD into the bucket with the stones.

3



MIX

Mix the stones & EASIHOLD together, ensuring stones are fully coated.

4



SPREAD

Spread your stones out onto the desired area, at a minimum depth of 25mm.

5



COMPACT

Use a trowel to compact the stones/level the surface.



TOP TIP

For extra hold, once your surface is dry spray a top coat of EASIHOLD on the finished surface.



In the case of a spillage use a stiff brush and hot water to remove EASIHOLD from unwanted areas.



Wear gloves and tape off your chosen area to ensure a neat and tidy application.



No need to dilute - Easihold is ready to use.



Remember to flush out your airless sprayer with hot water after each use.